



Mini Aqua®

CONDENSATE REMOVAL PUMP

The world's slimmest condensate removal pump is designed to fit where other's can't!

12L/h max. flow

10m max. rec. head (flow rate 6L/h)


21dB(A) @ 1 m

Key Features


- Ultra slim
- High performance
- Plug & Play
- Anti siphon device

Suitability

- Up to 16kW / 54,000Btu/h
- High wall mini split systems; Ducted units; Floor standing & Chassis units
- **Perfect for...** installing directly inside the unit

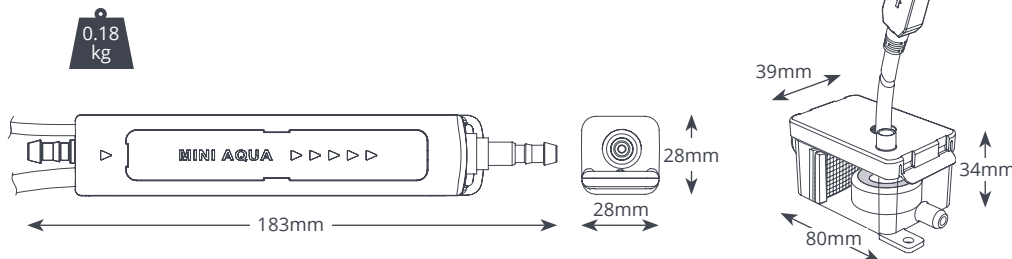

@ 230 VAC 50Hz	
Max. flow	12L/h @ 0m head
Max. rec. head	10m
Max. suction lift	2m
dB(A) @ 1m	21 dB(A)
Power supply	230 VAC, 50-60Hz, 0.11A, 16W
Rated	Non continuous
Class	II <input type="checkbox"/>
Max. unit output	16kW (54,000 Btu/h)
Max. water temp	40°C (104°F)
Discharge tube	6mm ID
IP Protection	IP24
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	✓
Self priming	✓

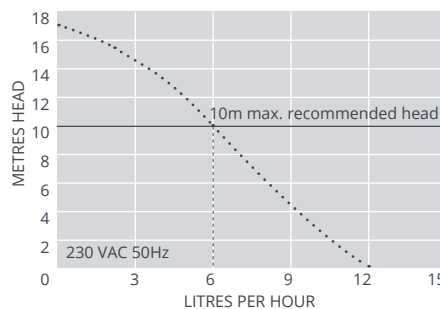

OPTIONS	
Mini Aqua	FP2406/2
† Pump only	
	Download manual at aspenspumps.com
	Watch installation video at aspenspumps.com

SUGGESTED XTRA ACCESSORIES		
Description		Part No.
1 Amp Fuse		FP2620
Tube To Soil Stack Adaptor		FP2038
Vinyl Tube Braided 1/4" (6mm)		AX5100

Visit aspenspumps.com for more installation accessories.

IN THE BOX
Mini Aqua pump • 1.5m Plug & Play power cable • Reservoir (inc. filter, float, lid) • 150mm Vinyl breather tube 6mm ID • Anti siphon device • 1.5m Suction tube 6mm ID • 220mm Blue inlet hose 14mm ID • Drain connector kit • Fixing kit • Install manual